

ADAM-4017/4017+ ADAM-4018/4018+ ADAM-4019+


8-channel Analog Input Modules with Modbus®

8-channel Thermocouple Input Module with Modbus®

8-channel Universal Analog Input Module with Modbus®



ADAM-4017/4017+

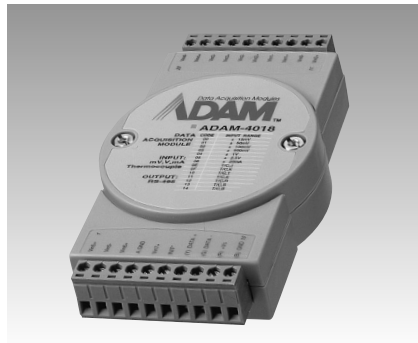

ADAM-4018/4018+



ADAM-4019+

Specifications

General

- Power Consumption 1.2 W @ 24 V_{DC}

Analog Input

- Channels Six differential, two single-ended (4017) eight differential (4017+)
- Ch. Independent Conf. ADAM-4017+ only
- Input Impedance Voltage: 20 MΩ Current: 120 Ω
- Input Type mV, V, mA
- Input Range ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±20 mA, 4-20mA (4017+ only)
- Modbus® ADAM-4017+ only
- Overvoltage Protection ±35 V
- Sampling Rate 10 samples/sec. (total)
- Span Drift ±25 ppm/°C
- TVS/ESD Protection Built-in
- Zero Drift ±6 μV/°C

Specifications

General

- Power Consumption 0.8 W @ 24 V_{DC}
- T/C-Burnout Detector Yes (4018+ only)

Analog Input

- Channels Six differential, two single-ended (4018) eight differential (4018+)
 - Ch. Independent Conf. ADAM-4018+ only
 - Input Impedance Voltage: 20 MΩ Current: 120 Ω
 - Input Range ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V, ±20 mA (4018); 4-20 mA (4018+)
 - Input Types Thermocouple, mV, V, mA (4018) (4018+ Supports T/C & 4-20 mA only)
 - Modbus® ADAM-4018+ only
 - Overvoltage Protection ±35 V
 - Sampling Rate 10 samples/sec. (total)
 - Span Drift ±25 ppm/°C
 - T/C Type and Temperature Ranges
- | | | | |
|---|---------------|---|---------------|
| J | 0 ~ 760° C | R | 500 ~ 1750° C |
| K | 0 ~ 1370° C | S | 500 ~ 1750° C |
| T | -100 ~ 400° C | B | 500 ~ 1800° C |
| E | 0 ~ 1000° C | | |
- TVS/ESD Protection Built-in
 - Zero Drift ±6 μV/°C

Specifications

General

- Power Consumption 1.0 W @ 24 V_{DC}

Analog Input

- Accuracy ±0.1% of voltage input
 - Bandwidth 13.1 Hz @ 50 Hz, 15.72 Hz @ 60 Hz
 - Burn-out Detection +4-20mA & all T/C
 - Channels 8 differential channels for individual input type 92 dB min.
 - CMR @ 50/60 Hz 16 bits
 - Resolution ±/-1V, +/-2.5V, +/-5V, +/-10V, +/-100mV, +/-500mV, +/-20mA, +4-20mA
 - Input Range Voltage: 20 MΩ Current: 120 Ω
 - Input Impedance T/C, mV, V, mA
 - Isolation Protection 3000 V_{DC}
 - Overvoltage Protection ±35 V
 - T/C Type and Temperature Range
- | | |
|---|---------------|
| J | 0 ~ 760 °C |
| K | 0 ~ 1370 °C |
| T | -100 ~ 400 °C |
| E | 0 ~ 1000 °C |
| R | 500 ~ 1750 °C |
| S | 500 ~ 1750 °C |
| B | 500 ~ 1800 °C |
- Span Drift ±25 ppm/°C
 - Zero Drift ±6 μV/°C

Common Specification

General

- Dimensions 70 x 122 x 30 mm
- Connectors 2 x Plug-in terminal block (#14-22 AWG)
- Enclosure ABS+PC
- Mounting DIN 35 rail, stack, wall
- Power Input Unregulated 10-30 V_{DC}
- Watchdog Timer 1.6 sec. (system)

Environment

- Humidity 5 ~ 95% RH
- Operating Temperature -10-70° C (-14-158° F)
- Storage Temperature -25-85° C (-13-185° F)

Ordering Information

- ADAM-4017 8-channel Analog Input Module
- ADAM-4017+ 8-channel Differential Analog Input Module w/Modbus®
- ADAM-4018 8-channel Thermocouple, mV, V, mA Input Module
- ADAM-4018+ 8-channel Differential, mA and Thermocouple Input Module w/Modbus®
- ADAM-4019+ 8-channel Universal Analog Input Module w/Modbus®